




## P-0921 2-Door Telephone Entry Controller

Speak to and grant access to two doors or a front door and an entry gate from any standard phone in the house by pressing a touchtone code\*. Pair the system with a Channel Vision IU or DP Series door station and a modulator for a complete residential AV access control solution.

Features	Benefits
2-Door Connections	Connect system to two Channel Vision door intercom stations to speak to and grant access to either
RJ-45 & Screw Terminal Connections	Easy & versatile connection options
Distinctive Telephone Ring	Distinguish between door visitors or incoming phone calls
Works Without an Active Phone Line (No CO Mode)	Perfect for installation in new homes when phone lines are not yet active OR for households that rely mainly on cell phones but still want the phone access to the front door
Compatible with Door Intercom Station	Works with Channel Vision IU & DP door stations – <i>Does not support Panasonic KSU system IU &amp; DPs</i>
Door Bell Chime Option	Door notification via telephone ring & standard door bell chime
2-Wires to the Front Door	Retrofit IU or DP intercom door station easily with existing doorbell chime wiring
3 Active LED Status Indicators	When phones ring; When door intercom station is in use; When door strike is activated
Doorbell Tone at Door Station	Visitor hears a tone when they press the doorbell button to acknowledge its ringing throughout the house
Built-In Aux Relay	Unlocks doors or gates remotely by the phone or can be utilized as a trigger contact to enable the input of an external paging system
Specifications	Typically @ 25° C
Power Supply	12VAC, 500mA
Connectors	Screw terminals & RJ-45 (TIA 568A)
Cable Requirements	CAT3 or CAT5, 18-24 AWG
REN	~ 0.1
Dimensions	6.5" (h) x 7" (w) x 1.5" (d)
Operating Temperature	-10°C to +50°C
Ring Output	>5 (capable of ringing > 10 phones with a REN of 0.5)
Compliances	FCC Part 15, subpart B & FCC Part 68 requirements; RoHS; Power supply meets UL1310 & CSA standards

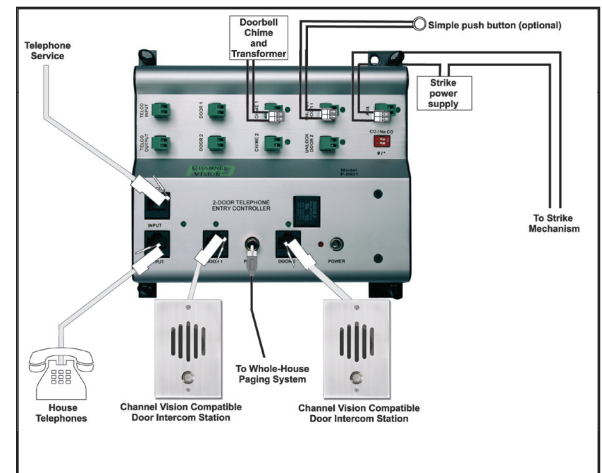

Channel Vision Central  
Structured Wiring



Channel Vision **PRO**  
IR & Audio Equipment



**ARIA™**  
Multi-Room Audio



Channel Vision Technology  
Modulators, Cameras, Intercoms



# CHANNEL VISION™

www.channelvision.com  
800.840.0288

234 Fischer Ave., Costa Mesa, CA 92626 USA

Channel Vision Technology, Channel Vision Central and ARIA are trademarks of Channel Vision Technology

Specifications subject to change without notice.

Panasonic is a registered trademark of Matsushita Electric Industrial Co., LTD

© Channel Vision Technology 2007